


Straight Reducer for Tube Ends with 24° Taper / O-Ring Type FI-REDSD ▪ Series S

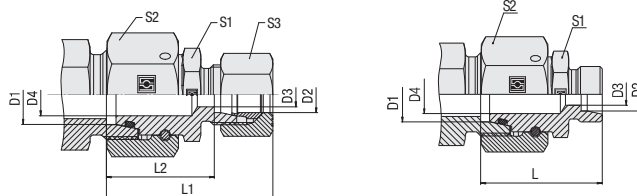

Ordering Codes

***FI-REDSD*-10/*08*L*-B*-W3*-DKO*-MS**

* Straight Reducer for Tube Ends
with 24° Taper / O-Ring (DKO)

FI-REDSD

* Outside Tube Diameter D1 (in mm)

-10

* Outside Tube Diameter D2 (in mm)

08

* Series Light Series (pages 122/123)
Heavy Series (pages 124/125)

L
S

* Seal Material NBR (Buna-N®)
FKM/FPM (Viton®)
EPDM

-B

-V

-E

* Material Code Steel, zinc/nickel-plated

-W3

Please contact STAUFF for alternative
materials and surface finishings.

* Assembling / Kitting Fitting body supplied with
swivel nut and O-ring

-DKO

Fitting body supplied with
cutting ring and union nut

-MS

Fitting body supplied with
soft-sealing cutting ring
and union nut

-MSV

Connecting Parts



Cutting Ring
Type **FI-DS**

Page 26



Soft-Sealing Cutting Ring
Type **FI-WDDS**

Page 27



Support Sleeve
Type **FI-VH**

Page 28



STAUFF Form Ring
Type **FI-AR**

Page 30



Union Nut
Type **FI-M**

Page 31



37° Flared Tube Fitting Set
Type **FI-AB**

Page 35

Spare Parts / Accessories



O-Ring
Type **O-RING**

Page 207

Series	Tube OD (^{mm} / _{in})		PN (^{bar} / _{psi})	Dimensions (^{mm} / _{in})									Weight (^{kg} / _{lbs}) ca. per 100 ²	Ordering Codes ³
	D1	D2		D3	D4	L	L1 ¹	L2	S1	S2	S3			
S	8	6	800	4	4	34	42	27	14	19	17	4,46	FI-REDS-08/06S-B-W3-DKO	
	.31	.24	11600	.16	.16	1.34	1.65	1.06	.55	.75	.67	9.80		
	10	6	800	4	4	33	42	27.5	17	22	17	5,93	FI-REDS-10/06S-B-W3-DKO	
	.39	.24	11600	.16	.16	1.30	1.65	1.08	.67	.87	.67	13.05		
	10	8	800	5	5	33	42	27.5	17	22	19	6,07	FI-REDS-10/08S-B-W3-DKO	
	.39	.31	11600	.20	.20	1.30	1.65	1.08	.67	.87	.75	13.35		
	12	6	630	4	4	33	44	29	19	24	17	7,96	FI-REDS-12/06S-B-W3-DKO	
	.47	.24	9135	.16	.16	1.30	1.73	1.14	.75	.94	.67	17.52		
	12	8	630	5	5	33	44	29	19	24	19	8,04	FI-REDS-12/08S-B-W3-DKO	
	.47	.31	9135	.20	.20	1.30	1.73	1.14	.75	.94	.75	17.68		
	12	10	630	7	7	35	46	29.5	19	24	22	7,90	FI-REDS-12/10S-B-W3-DKO	
	.47	.39	9135	.28	.28	1.38	1.81	1.16	.75	.94	.87	17.38		
	14	6	630	4	4	36	46	32	22	27	17	10,46	FI-REDS-14/06S-B-W3-DKO	
	.55	.24	9135	.16	.16	1.42	1.81	1.26	.87	1.06	.67	23.02		
	14	8	630	5	5	36	46	32	22	27	19	10,53	FI-REDS-14/08S-B-W3-DKO	
	.55	.31	9135	.20	.20	1.42	1.81	1.26	.87	1.06	.75	23.16		
	14	10	630	7	7	37	47	31	22	27	22	10,12	FI-REDS-14/10S-B-W3-DKO	
	.55	.39	9135	.28	.28	1.46	1.85	1.22	.87	1.06	.87	22.27		
	14	12	630	8	8	37	47	31	22	27	24	10,44	FI-REDS-14/12S-B-W3-DKO	
	.55	.47	9135	.31	.31	1.46	1.85	1.22	.87	1.06	.94	22.97		
	16	6	630	4	11	37	47	32	22	30	17	10,79	FI-REDS-16/06S-B-W3-DKO	
	.63	.24	9135	.16	.43	1.46	1.85	1.26	.87	1.18	.67	23.74		
	16	8	630	5	11	37	47	32	22	30	19	11,04	FI-REDS-16/08S-B-W3-DKO	
	.63	.31	9135	.20	.43	1.46	1.85	1.26	.87	1.18	.75	24.29		
	16	10	630	7	7	38	48	31.5	22	30	22	7,67	FI-REDS-16/10S-B-W3-DKO	
	.63	.39	9135	.28	.28	1.50	1.89	1.24	.87	1.18	.87	16.87		
	16	12	630	8	8	38	48	31.5	22	30	24	12,07	FI-REDS-16/12S-B-W3-DKO	
	.63	.47	9135	.31	.31	1.50	1.89	1.24	.87	1.18	.94	26.55		
	16	14	630	10	10	41	51	33	24	30	27	12,64	FI-REDS-16/14S-B-W3-DKO	
	.63	.55	9135	.39	.39	1.61	2.01	1.30	.94	1.18	1.06	27.80		
	20	6	400	4	14	40	51	36	27	36	17	17,16	FI-REDS-20/06S-B-W3-DKO	
	.79	.24	5800	.16	.55	1.57	2.01	1.42	1.06	1.42	.67	37.75		
	20	8	400	5	14	40	51	36	27	36	19	17,61	FI-REDS-20/08S-B-W3-DKO	
	.79	.31	5800	.20	.55	1.57	2.01	1.42	1.06	1.42	.75	38.74		
	20	10	400	7	14	41	52	35.5	27	36	22	17,49	FI-REDS-20/10S-B-W3-DKO	
	.79	.39	5800	.28	.55	1.61	2.05	1.40	1.06	1.42	.87	38.48		
	20	12	400	8	14	41	52	35.5	27	36	24	17,76	FI-REDS-20/12S-B-W3-DKO	
	.79	.47	5800	.31	.55	1.61	2.05	1.40	1.06	1.42	.94	39.08		
	20	14	400	10	14	44	55	37	27	36	27	19,83	FI-REDS-20/14S-B-W3-DKO	
	.79	.55	5800	.39	.55	1.73	2.17	1.46	1.06	1.42	1.06	43.62		
	20	16	400	12	12	44	55	36.5	27	36	30	19,34	FI-REDS-20/16S-B-W3-DKO	
	.79	.63	5800	.47	.47	1.73	2.17	1.44	1.06	1.42	1.18	42.56		
	25	6	400	4	18	41	53	38.5	36	46	17	29,87	FI-REDS-25/06S-B-W3-DKO	
	.98	.24	5800	.16	.71	1.61	2.09	1.52	1.42	1.81	.67	65.72		
	25	8	400	5	18	41	53	38.5	36	46	19	30,39	FI-REDS-25/08S-B-W3-DKO	
	.98	.31	5800	.20	.71	1.61	2.09	1.52	1.42	1.81	.75	66.85		
	25	10	400	7	18	42	54	38	36	46	22	16,95	FI-REDS-25/10S-B-W3-DKO	
	.98	.39	5800	.28	.71	1.65	2.13	1.50	1.42	1.81	.87	37.29		
	25	12	400	8	18	42	54	38	36	46	24	30,41	FI-REDS-25/12S-B-W3-DKO	
	.98	.47	5800	.31	.71	1.65	2.13	1.50	1.42	1.81	.94	66.91		
	25	14	400	10	18	45	57	40	36	46	27	30,95	FI-REDS-25/14S-B-W3-DKO	
	.98	.55	5800	.39	.71	1.77	2.24	1.57	1.42	1.81	1.06	68.09		
	25	16	400	12	18	45	57	39	36	46	30	30,29	FI-REDS-25/16S-B-W3-DKO	
	.98	.63	5800	.47	.71	1.77	2.24	1.54	1.42	1.81	1.18	66.65		
	25	20	400	16	16	49	61	39	36	46	36	32,97	FI-REDS-25/20S-B-W3-DKO	
	.98	.79	5800	.63	.63	1.93	2.40	1.54	1.42	1.81	1.42	72.53		

¹ Approximate dimension in assembled condition.


² Weight excluding cutting ring and union nut.

³ Standard scope of delivery: Fitting body only.

Standard seal material is NBR (Buna-N®).



Straight Reducer for Tube Ends with 24° Taper / O-Ring Type FI-RESDS - Series S

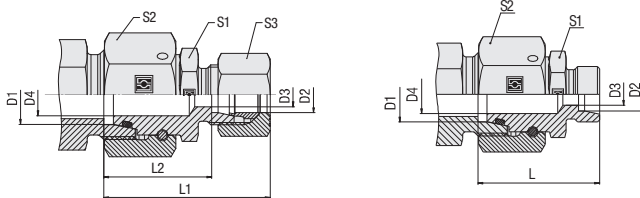

Series	Tube OD (mm/in)		PN (bar/psi)	Dimensions (mm/in)								Weight (kg/lbs) ca. per 100 ²	Ordering Codes ³
	D1	D2		D3	D4	L	L1 ¹	L2	S1	S2	S3		
S	30	6	400	4	22	46	59	44	41	50	17	37,93	FI-RESDS-30/06S-B-W3-DKO
	1.18	.24	5800	.16	.87	1.81	2.32	1.73	1.61	1.97	.67	83.45	
	30	8	400	5	22	46	59	44	41	50	19	31,17	FI-RESDS-30/08S-B-W3-DKO
	1.18	.31	5800	.20	.87	1.81	2.32	1.73	1.61	1.97	.75	68.57	
	30	10	400	7	22	47	60	43,5	41	50	22	38,28	FI-RESDS-30/10S-B-W3-DKO
	1.18	.39	5800	.28	.87	1.85	2.36	1.71	1.61	1.97	.87	84.22	
	30	12	400	8	22	47	60	43,5	41	50	24	38,65	FI-RESDS-30/12S-B-W3-DKO
	1.18	.47	5800	.31	.87	1.85	2.36	1.71	1.61	1.97	.94	85.03	
	30	14	400	10	22	50	63	45	41	50	27	38,88	FI-RESDS-30/14S-B-W3-DKO
	1.18	.55	5800	.39	.87	1.97	2.48	1.77	1.61	1.97	1.06	85.53	
	30	16	400	12	22	50	63	44,5	41	50	30	38,59	FI-RESDS-30/16S-B-W3-DKO
	1.18	.63	5800	.47	.87	1.97	2.48	1.75	1.61	1.97	1.18	84.89	
	30	20	400	16	22	53	66	44,5	41	50	36	39,86	FI-RESDS-30/20S-B-W3-DKO
	1.18	.79	5800	.63	.87	2.09	2.60	1.75	1.61	1.97	1.42	87.69	
	30	25	400	20	20	56	69	45	41	50	46	42,96	FI-RESDS-30/25S-B-W3-DKO
	1.18	.98	5800	.79	.79	2.20	2.72	1.77	1.61	1.97	1.81	94.51	
	38	6	400	4	30	47	62	47,5	50	60	17	55,50	FI-RESDS-38/06S-B-W3-DKO
	1.50	.24	5800	.16	1.18	1.85	2.44	1.87	1.97	2.36	.67	122.10	
	38	8	400	5	30	47	62	47,5	50	60	19	55,50	FI-RESDS-38/08S-B-W3-DKO
	1.50	.31	5800	.20	1.18	1.85	2.44	1.87	1.97	2.36	.75	122.10	
	38	10	400	7	30	48	63	47	50	60	22	56,40	FI-RESDS-38/10S-B-W3-DKO
	1.50	.39	5800	.28	1.18	1.89	2.48	1.85	1.97	2.36	.87	124.08	
	38	12	400	8	30	48	63	47	50	60	24	55,50	FI-RESDS-38/12S-B-W3-DKO
	1.50	.47	5800	.31	1.18	1.89	2.48	1.85	1.97	2.36	.94	122.10	
	38	14	400	10	30	51	66	49	50	60	27	62,87	FI-RESDS-38/14S-B-W3-DKO
	1.50	.55	5800	.39	1.18	2.01	2.60	1.93	1.97	2.36	1.06	138.32	
	38	16	400	12	30	51	66	48	50	60	30	55,80	FI-RESDS-38/16S-B-W3-DKO
	1.50	.63	5800	.47	1.18	2.01	2.60	1.89	1.97	2.36	1.18	122.76	
	38	20	400	16	30	55	70	48	50	60	36	57,40	FI-RESDS-38/20S-B-W3-DKO
	1.50	.79	5800	.63	1.18	2.17	2.76	1.89	1.97	2.36	1.42	126.28	
	38	25	400	20	30	58	73	48,5	50	60	46	59,30	FI-RESDS-38/25S-B-W3-DKO
	1.50	.98	5800	.79	1.18	2.28	2.87	1.91	1.97	2.36	1.81	130.46	
	38	30	400	25	25	61	76	49	50	60	50	63,70	FI-RESDS-38/30S-B-W3-DKO
	1.50	1.18	5800	.98	.98	2.40	2.99	1.93	1.97	2.36	1.97	140.14	

¹ Approximate dimension in assembled condition.

² Weight excluding cutting ring and union nut.

³ Standard scope of delivery: Fitting body only.

Standard seal material is NBR (Buna-N®).

Ordering Codes

***FI-RESDS*-10/*08*L*-B*-W3*-DKO*-MS**

* Straight Reducer for Tube Ends with 24° Taper / O-Ring (DKO) **FI-RESDS**

* Outside Tube Diameter D1 (in mm) **-10**

* Outside Tube Diameter D2 (in mm) **08**

* Series Light Series (pages 122/123) **L**
Heavy Series (pages 124/125) **S**

* Seal Material NBR (Buna-N®) **-B**
FKM/FPM (Viton®) **-V**
EPDM **-E**

* Material Code Steel, zinc/nickel-plated **-W3**

Please contact STAUFF for alternative materials and surface finishings.

* Assembling / Kitting Fitting body supplied with swivel nut and O-ring **-DKO**

Fitting body supplied with cutting ring and union nut **-MS**

Fitting body supplied with soft-sealing cutting ring and union nut **-MSV**

Connecting Parts

	Cutting Ring Type FI-DS	Page 26
	Soft-Sealing Cutting Ring Type FI-WDDS	Page 27
	Support Sleeve Type FI-VH	Page 28
	STAUFF Form Ring Type FI-AR	Page 30
	Union Nut Type FI-M	Page 31
	37° Flared Tube Fitting Set Type FI-AB	Page 35

Spare Parts / Accessories

	O-Ring Type O-RING	Page 207
--	------------------------------	----------

